


Saylor Classic

Non-Metallic Flexible Conduit

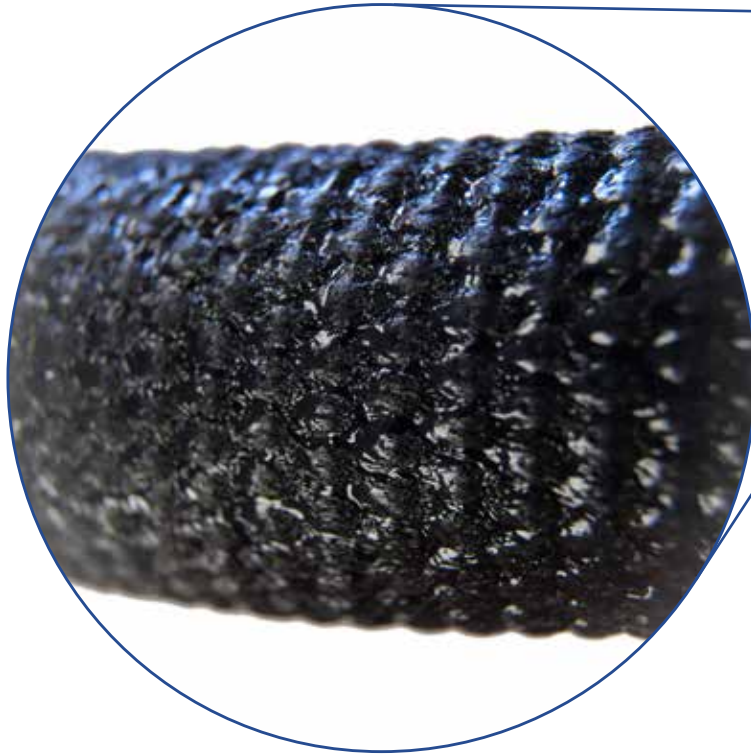

Flexibility & Innovation

Description

Saylor CLASSIC - a Non-Metallic Flexible Conduit - is woven from the highest grade yarns and fibers an application requires. Standard products are a blend of Poly Fiber, Paper, and an Asphaltic Resin.

Applications

- Wire Harness
- Fuel & Vacuum Lines
- Battery Cables
- Mold Duct
- Oil Indicators
- Control Rods
- EGR Tubes
- Many Others

“Manufacturing flexible, non-metallic, wire and hose products for well over a century.”



Specifications

- HH-T-791 A,B,C
- SAE J562A
- ESB-M3L38-A
- ESF-M3L45-A
- ESB-M99H96
- MS-542
- MSJZ9-31
- GM-675, 676, 677, 678M



Typical Properties

- Shock Absorbent
- Oil and Fuel Resistant
- Completely Flexible
- Dimensionally Stable
- Sound Absorbent
- Fire and Water Resistant
- Temperature Insensitive—max. temp 180°C
- Impervious to Hostile Environment



Material Description

Test Data	Actual Measured	Specification
Normal Operating Temp.	110°C	90°C
Picks per inch	16	15
Fill Ends	2	2
Warp Ends	32	32
Fill Construction	Kraft	Kraft
Fiber Construction	10/3 ply – Cotton/Poly blend	10/3 ply – Cotton
Dimensions – I.D. - Inch	.235"	.230-.250"
Total Weight	.2816 oz./ft	Min 28.16 oz. – 100ft.
LOOM Weight	.24 oz./ft	
Asphalt Resin Weight	.416 oz./ft.	
Shrinkage	2.1%	3% Max.
Breaking Strength	84 lbs.	Min 65 lbs.
Abrasion Resistance	No broken paper yarns	Fiber yarn may be broken, but no broken paper yarns

Availability

- Range of Sizes: 1/8" thru 1-1/2" I.D.
- Cut to Length and Slit product - Can be produced in multiple colors

* This Data Sheet to be used as reference and is not intended to be used as a basis for production specification.

12-14-17 JHS

The information and illustrations given herein are to be reliable. Saylor Technical Products makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Saylor Technical products only obligations are those in the standard term of sale for this product and Saylor Technical Products will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.

